

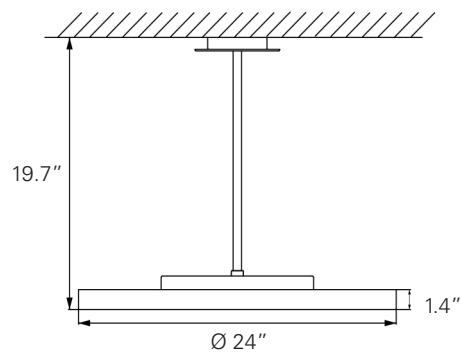


ViVAA TECHNICAL DATA

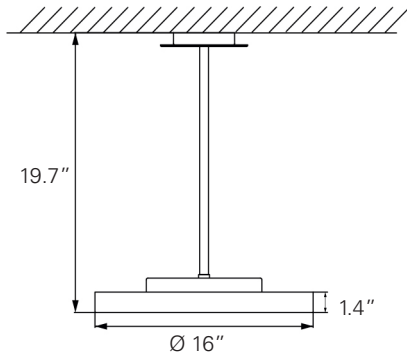

Sample of light distributions available

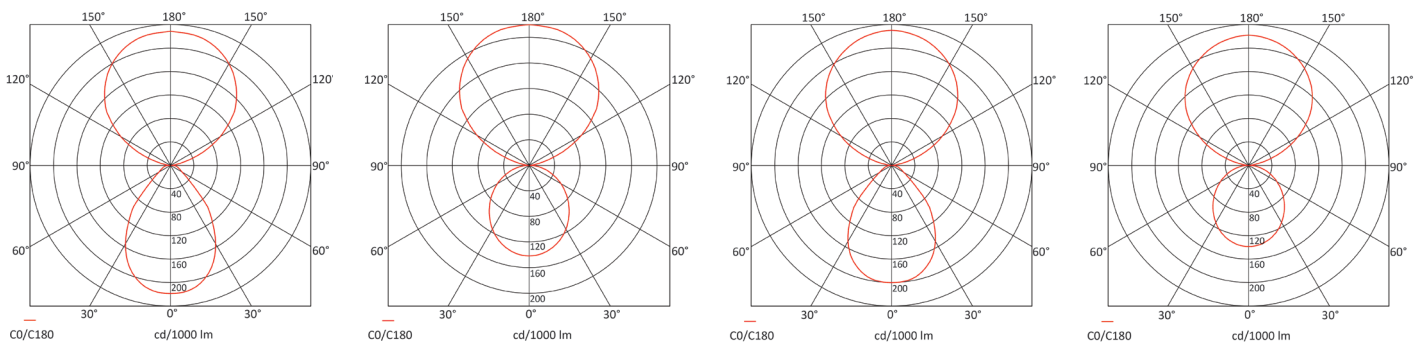

ViVAA features at a glance

- Stainless steel luminaire housing
- 50,000 maintenance-free hours of LED life
- High-quality components and materials
- Available as ceiling mount or pendant
- 16" or 24" diameter fixtures
- Suitable for any room height including sloped ceilings
- Easy to clean
- CDP microprism, satine diffuser
- 0-10V dimmable



High quality LED modules

Model	Diameter (inches)	Lumens	Power	Controls	Color Temperature	Type
ViVAA C400	16	5300	55W	on/off and 0-10V dimming standard	3000K/4000K	Ceiling or pendant
	16	7000	70W	on/off and 0-10V dimming standard	3000K/4000K	Ceiling or pendant
ViVAA C600	24	5300	55W	on/off and 0-10V dimming standard	3000K/4000K	Ceiling or pendant
	24	7000	70W	on/off and 0-10V dimming standard	3000K/4000K	Ceiling or pendant

Waldmann Lighting Company

9 W. Century Drive
 Wheeling, Illinois 60090
 www.waldmannlighting.com

Telephone (847) 520 1060
 Fax (847) 520 1730
 waldmann@waldmannlighting.com